



# **EM DC336**

Door Closer

[www.ementrematic.com](http://www.ementrematic.com)

# Integrated electrohydraulic

**The EM DC336 in an extended product package OEM, suitable for exterior and interior doors.**

## Applications

- For maximum door weight 60 kg and door leaf width 950 mm with a sliding arm installation.

## Features

- Adjustable closing force size EN 1-3 with the sliding arm according EN1154
- Back check (BC) as a standard feature



## Common features

- CE certified with a sliding arm
- Separate adjusting valves for closing and latching speed
- Back check (BC) as a standard feature
- Wide operating temperature range: -35°C to +45°C
- Adjustable latching and back check starting angle by grooved spindle
- Easy adjustment of arm height (14 mm)
- Two pressure relief valves to protect against abuse
- Die-cast aluminium body manufactured from high performance silicon alloy


## Installation

**with sliding arm DC193, DC194**

OPENING SIDE

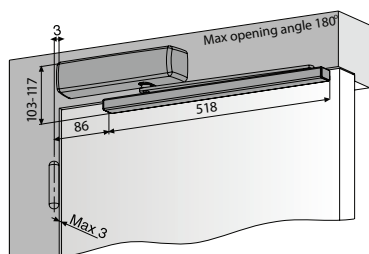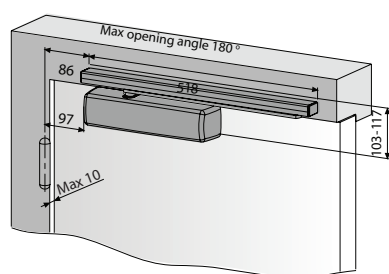


CLOSING SIDE

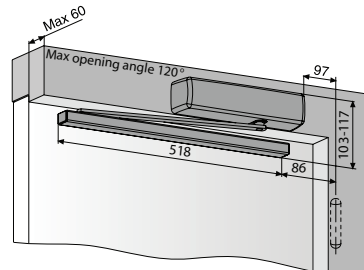


# Adjustments

- In DC336 Back check (BC) as a standard feature

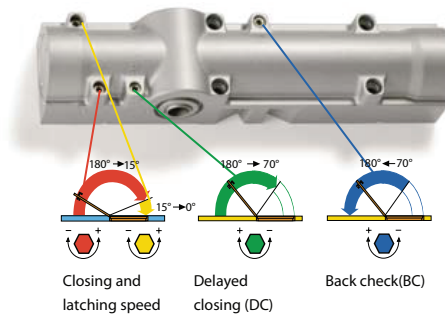

## Dimensions

- Width 280 mm, height 65 mm, depth 63 mm

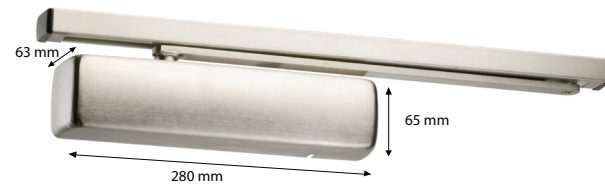

**Entrematic**

Box 669, SE 261 25 Landskrona

Phone: +46 10 47 48 300

Fax: +46 418 201 15

[info.em@entrematic.com](mailto:info.em@entrematic.com)

[www.ementrematic.com](http://www.ementrematic.com)

[www.entrematic.com](http://www.entrematic.com)

