

EM EMPS

Profile System

www.ementrematic.com

Complete system

The EM EMPS profile system is specially developed to create highly functional and decorative automatic sliding door entrances. The high quality system is comprised of slim line aluminium profiles resulting in doors framed all around and weather-sealed.


The EM EMPS can easily be calculated and quickly assembled into a finished door. Glass fitting for the EM EMPS is based on dry glazing and does not require any silicon sealants and thus no waiting time.

Easy to assemble


The EM EMPS is suitable for most type of doors and sizes such as bi-parting, single sliding with or without fixed side screens. It can be wall-mounted or beam-mounted and can be used with both single glass (8 mm, 10 mm and 12 mm) and Thermo glass (20 mm/22 mm).

The EM EMPS is delivered as separate profiles, rubber and fixing details to be cut-to-size and assembled to a complete door and screen system. The EM EMPS is the natural door system for the EM Entrematic EMSL sliding door operator.


Bi-parting without side screens

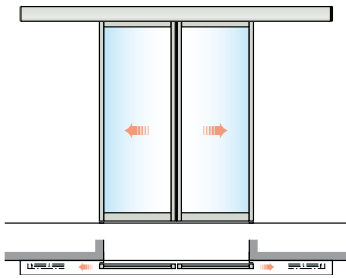





Single sliding with side screen
(left opening shown)

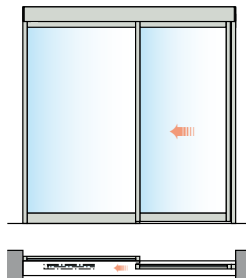

Single sliding without side screen
(left opening shown)

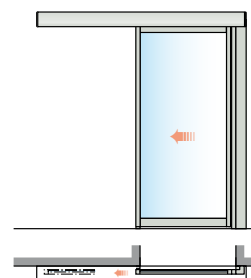

Bi-parting with side screens, beam mounted

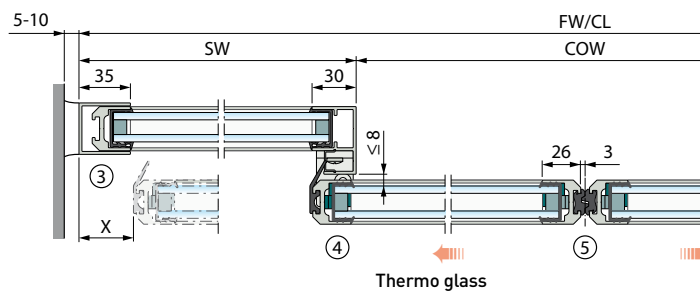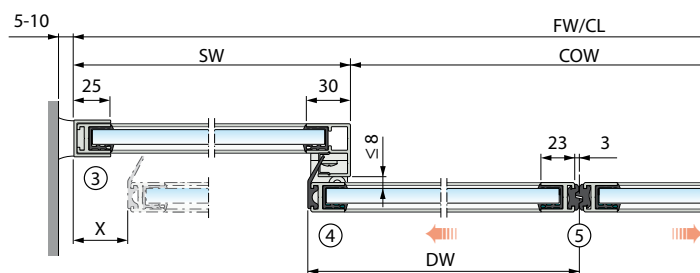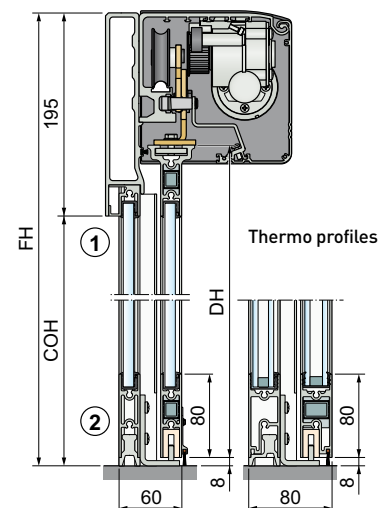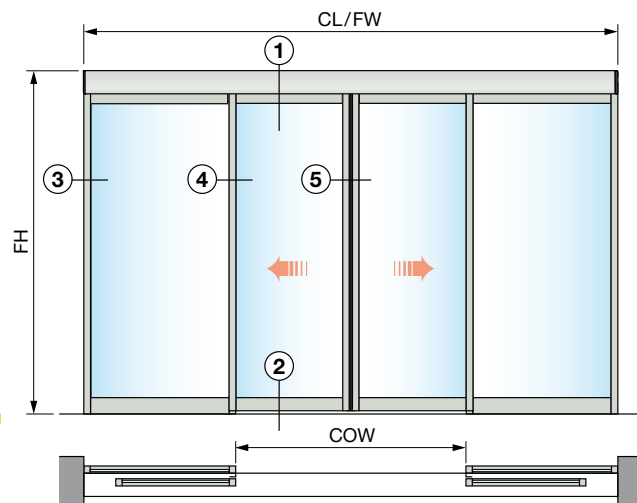

FW	Frame width
FH	Frame height
CL	Cover length
COW	Clear opening width
COH	Clear opening height
DW	Door leaf width
DH	Door leaf height
SW	Side screen width
X	Safety distance

Entrematic

Box 669, SE 261 25 Landskrona
Phone: +46 10 47 48 300
Fax: +46 418 201 15
info.em@entrematic.com
www.ementrematic.com
www.entrematic.com

